

Rated EW60 for fire resistance and heat radiation (limited sizes only), the unique insulating core minimises the possibility of heat transfer through the shutter and risk of a secondary fire starting on the other side. All Fireroll fire shutters hold CE, UKCA & EWCL5 certification and can be fitted to multiple support structures (masonry, concrete and protected structural steelwork).



APPLICATIONS

Fireroll fire shutters are tested and certified by Warrington fire to EWCL5 and designed for commercial and service sites. The FS60i is tested to a 1 hour fire rating requirement to stop the spread of fire through an opening and limit the transmission of heat radiation.

In the event of a fire alarm, the fire shutter automatically descends by operation of the motor and audio-visual panel. Common fire protection sites include canteens, shopping malls and transport facilities, but the nature of the roller shutter design also lends itself to providing an extra layer of security.

CURTAIN SLAT

Double-skinned 81mm flat steel with an insulating core.

Finish: Galvanised finish as standard.
Option to powder coat any RAL / BS colour (surcharges apply).

Visible Face:	95mm
Weight per m²:	21kg
Maximum	10000mm*
Width:	70m²*
Maximum Area:	

* Size limitations vary dependent on motor

CASING

Galvanised steel casing & end plates as standard.
Reveal fix installations are supplied with a fascia as standard.
Finish: Galvanised finish as standard.
Option to powder coat any RAL / BS colour.

Guide Height (mm)	Plate Size (mm)
1500	400
2500	450
3250	500
4000	550
5000	600

All plate sizes are shown as a guide only.

BOTTOM RAIL

Galvanised steel bottom rail.

GUIDE CHANNELS

Galvanised steel guide channels. Width of 85mm

Finish: Galvanised finish as standard. Option to powder coat any RAL / BS colour (surcharge applies).

OPERATION

Inline Motor: Single phase inline chain driven motor (three phase option available) with push button control audio-visual panel, chain override, fusible link and solenoid release.

All Fireroll fire shutters can be connected into fire alarms and building management systems as required.


FS60i

1 HOUR RATED INSULATED FIRE SHUTTER :: TECHNICAL DATASHEET

ROCHÉ



INLINE MOTOR - FACEFIX

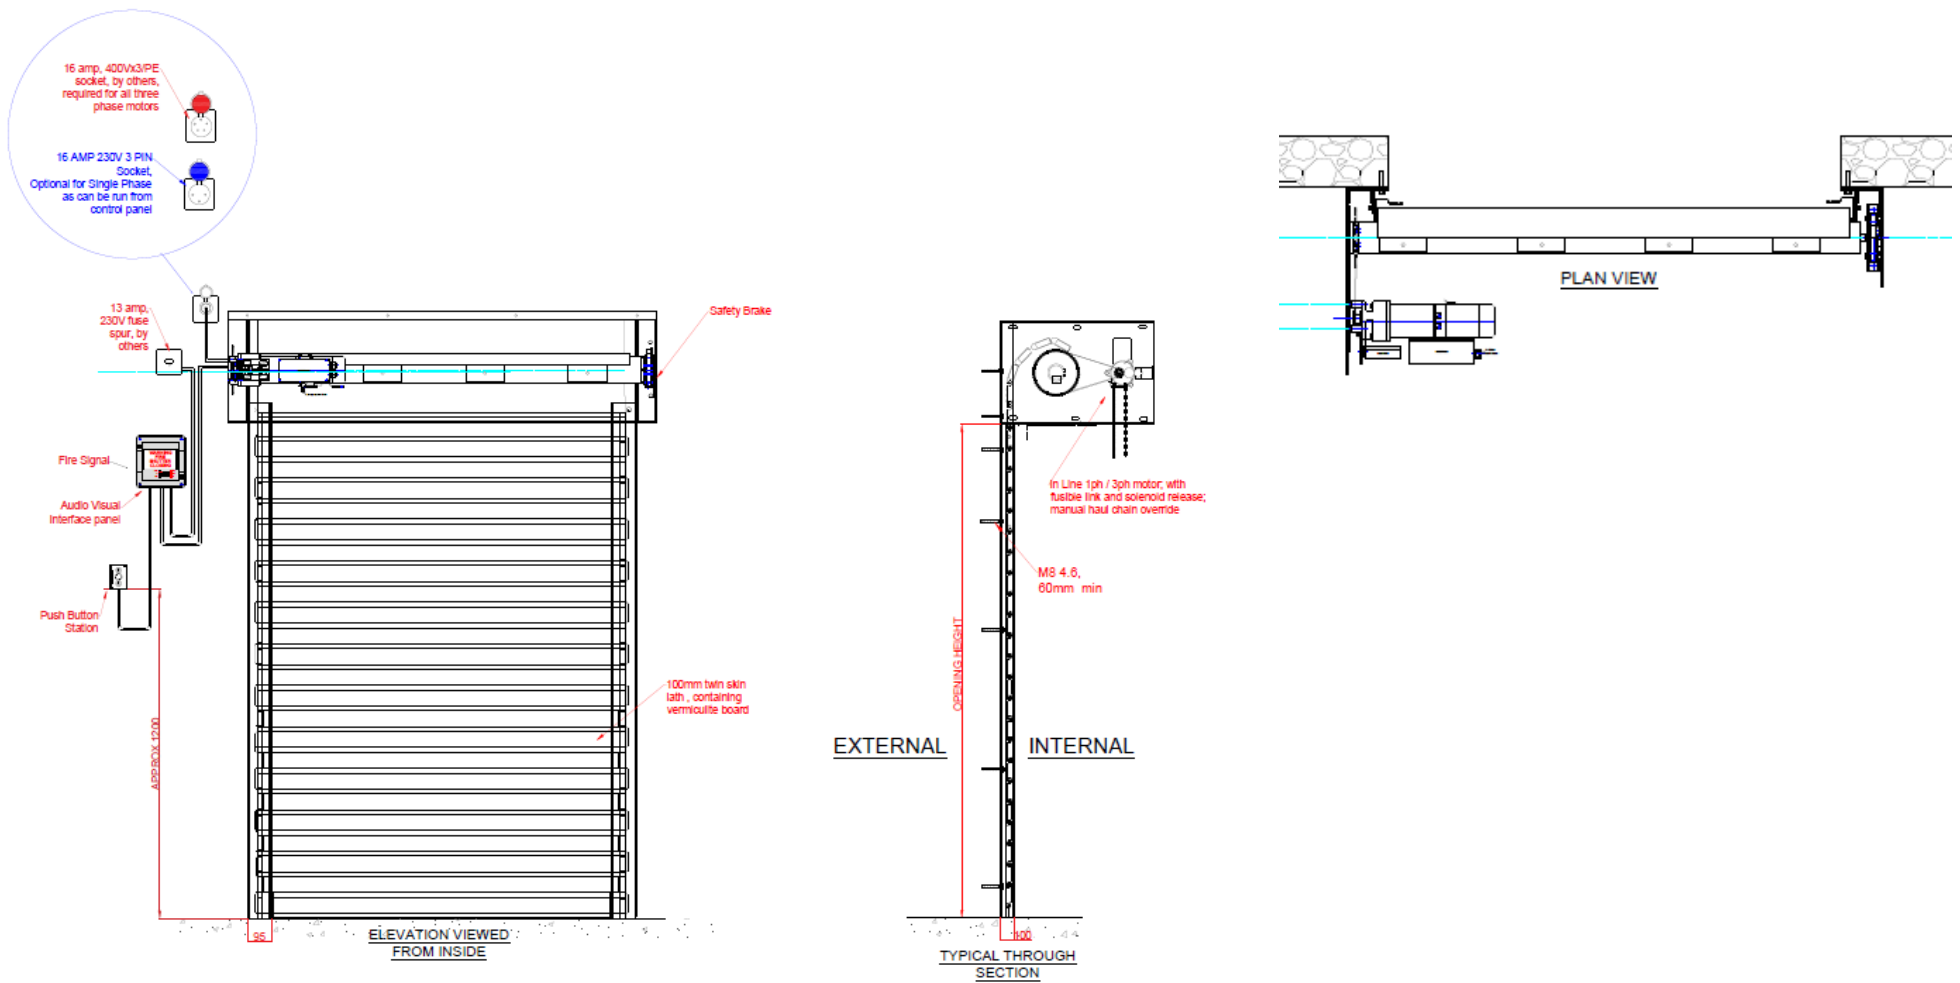

INLINE MOTOR - REVEAL FIX

